




PH. 800-321-8073

FX. 334-855-3507

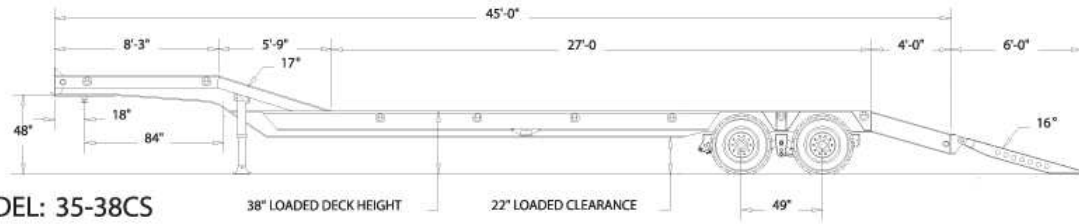

MODEL: 35-38CS

Model LB35-38

www.pittstrailers.com

STANDARD FEATURES

Load Capacity	70,000lbs. In 16'
Weight	15,800lbs.
Overall Length	41'
Width	8'6"
Deck Length	29' (26' Level Deck + 3' Dovetail)
Deck Height	38" Loaded
Gooseneck	Exposed Neck w/ Steel Motor Grader Ramps
Fifth Wheel Height	48"
King Pin Swing Radius	84"
King Pin Setting	18"
Mainframe	16" Wide Flange – Mill Roll "I" Beam
Siderails	12" Wide Flange – Mill Roll "I" Beam
Cross Members	8" Wide Flange – Mill Roll "I" Beam
Wheel Wells	Covered with Check Plate & Traction Bars
Dovetail	36" Covered with Check Plate & Traction Bars
Loading Ramps	Spring Assist, 24"x 72"
Landing Gear	Two Speed, 50,000lbs. Capacity
Lashing Rings	8 Per Side (16 total)
Decking	Full 1-3/4" Oak
Suspension	Hutch Three Point, Four Spring, with 14,000 lbs. Cap. Springs
Axles	25,000lbs. Capacity, 77.5" Track, Auto Slack Adjusters, Type 30 Brake Chambers, outboard drums, ABS Anti Lock Brakes
Brakes	16 1/2" x 7"
Tires	255/70R22.5 Low Profile Radials
Wheels	8.25x22.5 Steel Disc/ Hub Piloted
Wiring	D.O.T. Sealed Wiring Harness, Sealed Lights Rubber Mounted
Tool Box	Covered In Gooseneck
Mud Flaps	Spray Guard and Anti-Sail
Flag Holders	On All Four Corners
Paint	Black (Two Part Primer w/ Two Part Polyurethane Paint)

NOTE ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WEIGHTS AND DIMENSIONS ARE APPROXIMATE

OPTIONAL EQUIPMENT

GOOSENECK

- Revolver Greaseless Coupling System (Eliminates Need To Grease 5th Wheel) _____
- No Motor Grader Ramps _____
- 90° Gooseneck With Flat Upper Deck - Wood Filled _____

MAINFRAME – Fabricated "I" Beam with Positive Camber

DECK

- Additional Length In Deck Area
- Additional Width 9' includes 83.5" Track Axles
- 10' includes 95.5" Track Axles
- Widening Brackets
- Apitong 1- 3/4" (In Lieu of Oak)
- Floor Clips (In Lieu of Screws)

BOGIE

- Type 30/30 Spring Brakes (Per Axle)
- Aluminum Wheels (Outside Polished)
- Single Point 50,000 lb. Cap
- Air Ride 50,000 lb. Cap.
- Dovetail Covered with Wood in Lieu of Check Plate
- 48" Dovetail Covered with Check Plate & Traction Bars
- 60" Dovetail Covered with Check Plate & Traction Bars
- Rear Hydraulic Ramps (36" x 96")
- Double Folding (36" x 144")