




PH. 800-321-8073

FX. 334-855-3507

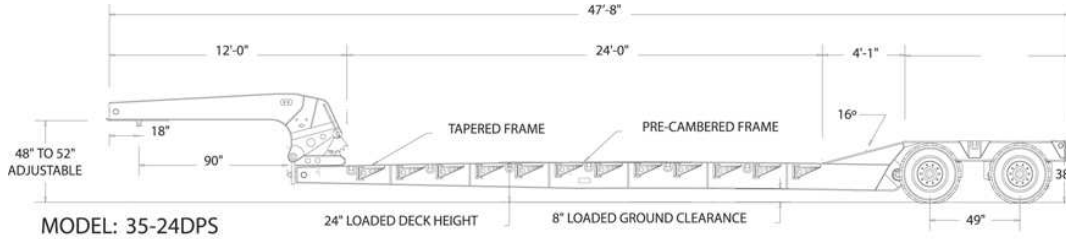

Model LB35-24DPS

www.pittstrailers.com

STANDARD FEATURES

Load Capacity	70,000 lbs. In 16'
Weight	16,700lbs.
Overall Length	47' 8"
Width	8'6"
Deck Length	24' Cambered Deck
Deck Height	24" Loaded (Adj. Deck Heights 16", 19", 21", 23", 24")
Ground Clearance	(Clearance At Above Deck Heights 4", 6", 8", 10", 11")
Gooseneck	Hydraulic Removable, Non-Ground Bearing Design, Two 8" Main Cylinders
Power Source	Set Up For Wet Line
Fifth Wheel Height	48" to 52"
King Pin Swing Radius	90"
King Pin Setting	18"
Mainframe	16" Fabricated With Positive Camber (Four I-Beam Design)
Siderails	16" Fabricated With Positive Camber (Four I-Beam Design)
Cross Members	8" I-Beam Located on 20" Centers
Front Deck Ramps	18" x 42" Paver Front Flip Ramps (8 Degree Load Angle)
Rear Bridge	16 Degree Slope from Deck to Rear Bridge
Boom Trough	Flat w/ Wood Center
Wheel Wells	Covered with Check Plate
Lashing Rings	8 Per Side (16 total)
Decking	Full 1-3/4" Apitong, Entire Deck Floored
Widening Brackets	Extends Trailer Width Two Feet In Deck
Suspension	Air Ride with Auto & Manual Controls, - 3 1/2" Down + 5" Up
Axles	25,000 lbs. Capacity, 77.5" Track, Auto Slack Adjusters, Type 30 Brake Chambers, 16 1/2" x 7" Brake Pads, Outboard Drums, ABS Anti-Lock Brakes, 49" Axle Spacings
Tires	255/70R22.5 Low Profile Radials
Wheels	8.25x 22.5 Steel Disc/Hub Piloted
Tool Box	In Front and Rear of Deck
Wiring	D.O.T. Sealed Wiring Harness, Sealed Lights Rubber Mounted
Paint	Black (Two Part Primer w/ Two Part Polyurethane Paint)

NOTE ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WEIGHTS AND DIMENSIONS ARE APPROXIMATE

OPTIONAL EQUIPMENT

GOOSENECK

- Self Contained 13 H.P. Honda Power Unit-Lockable (With Quick Disconnects) _____
- Revolver Greaseless Coupling System (Eliminates Need To Grease 5th Wheel) _____
- Steel Non-Load Bearing Gooseneck Fenders _____
- 110" Swing Clearance _____
- Dual King Pin (90" & 110") _____

DECK

- Additional Length In Deck Area (max. 2') call for additional length _____
- Center Deck Open _____
- Additional Width 9' includes 83.5" Track Axles _____
- 10' includes 95.5" Track Axles _____
- Aluminum Center Ramp _____
- Drop Side Design - Lowers Side Decks 5" _____
- Floor Clips (In Lieu of Screws) _____

BOGIE

- Type 30/30 Spring Brakes (Per Axle)
- Air Lift One Axle
- Single Point (2 Spring)
- Hutch, Three Point (4 Spring) add 24" in tandem area - 49" 8" over all
- Open Wheel Wells
- 36" Beaver Tail
- Rear Spring Assisted Loading Ramps 24" x 72" (Requires Beaver Tail)
- Rear Hydraulic Ramps 36" x 96" (Requires Beaver Tail)
- Double Folding (36" x 144")
- Aluminum Wheels (Outside Polished)
- 275/70R22.5 Tires
- Plumbed for Flip Axle and Receiving Brackets
- Third Flip Axle